

ENWORK

# LATITUDE FREESTANDING SCREEN

SCREENS



T I 0 0 5 6

Latitude Installation Instructions (LAXxxx) – Rev A.

***WARNING:***


Acrylic screens scratch and scuff easily. After removing protective film, immediately and carefully install the screen.

DO NOT remove protective film from acrylic screens, then stack them in a pile or against each other. Experience shows this will cause marring and scratching.


# ENWORK

## INSTALLATION GUIDE


### 1) PARTS AND FASTENERS INCLUDED

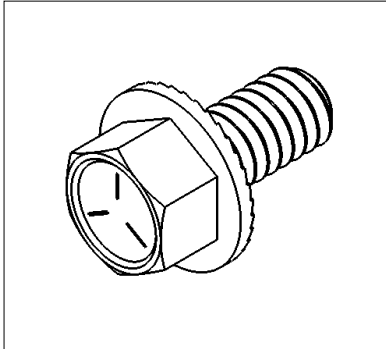


1/4-20 x 0.50" Serrated Flange  
Hex head Bolt

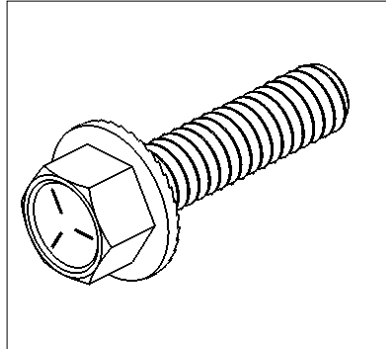


1/4-20 x 1.0" Serrated Flange  
Hex Head Bolt

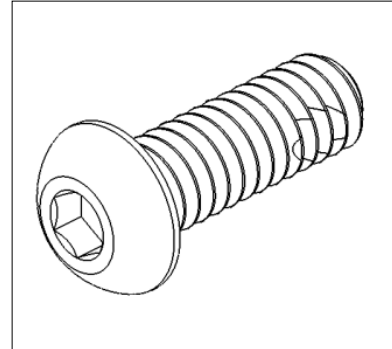


1/4-20 x .75" Button Head Hex  
Drive Machine screw

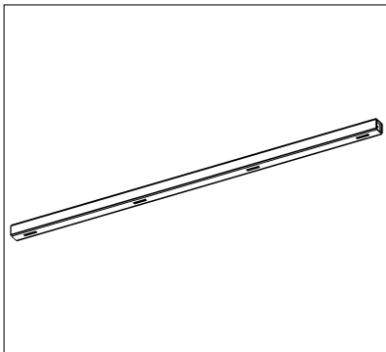


Top Crossbar Support Tube  
LAM-2394-XX

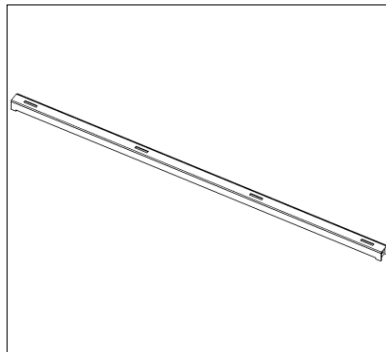


Bottom Crossbar Support Channel  
LAM-2396-XX

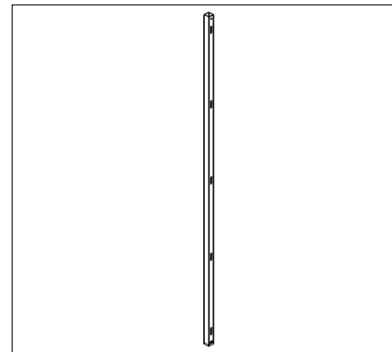


Vertical Support Tube  
LAM-2393-XX

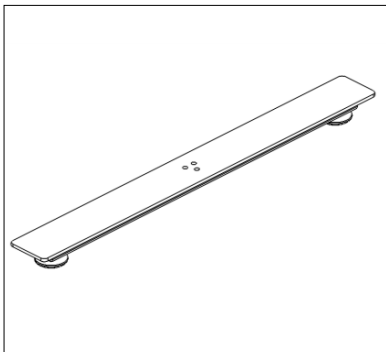

T-Foot  
LAM-1979-XX

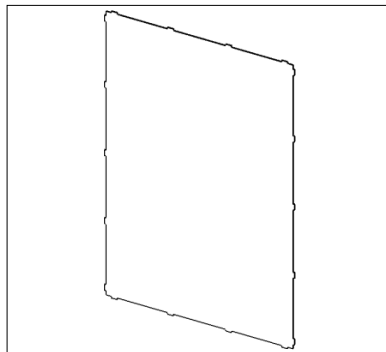

Acrylic Panel  
LAX-1090-xx

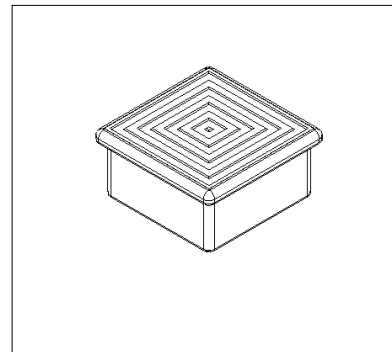


Black Plastic Tube Plug

# ENWORK

## INSTALLATION GUIDE


### 2) TOOLS AND SUPPLIES REQUIRED

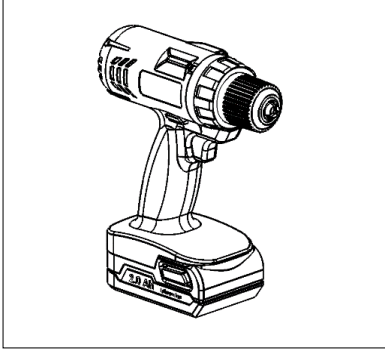

Drill/Driver



Combination Wrench  
(Ratcheting Recommended)

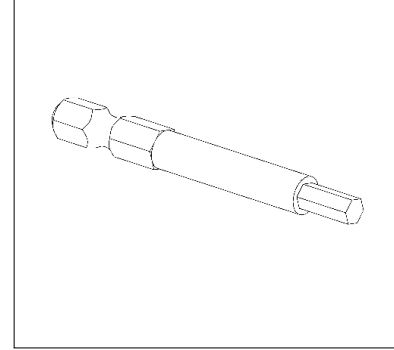

Hex Driver Bit

# ENWORK

## INSTALLATION GUIDE

### 3) ASSEMBLY:

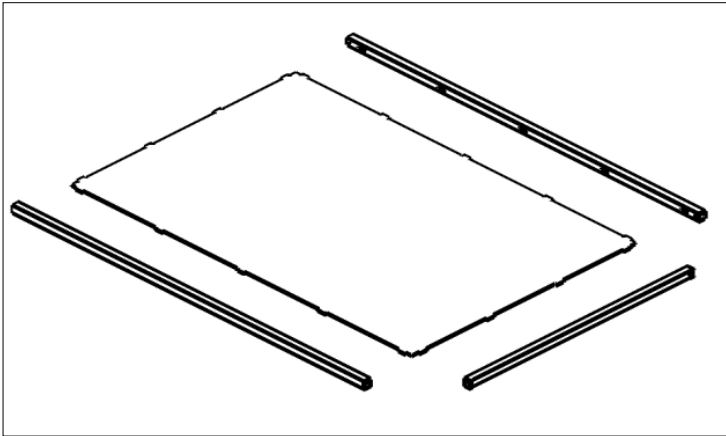


FIGURE 1

Lay the Acrylic panel on a clean, non marring surface.

Lay the Bottom Support Channel and Vertical Support tubes next to the acrylic as seen in Figure 1.

**Note: It is recommended to place a .50" Thick pad underneath the acrylic to improve alignment of tabs and slots.**

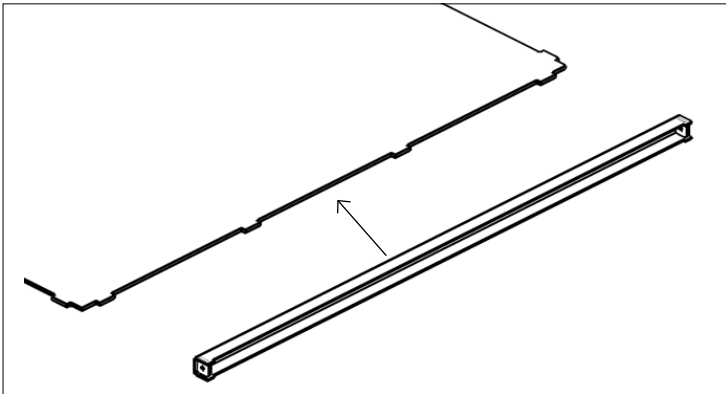


FIGURE 2

Slide the Bottom Crossbar Channel onto the Acrylic panel. Be sure to align the tabs of the Acrylic Panel with the slots in the Bottom Crossbar.

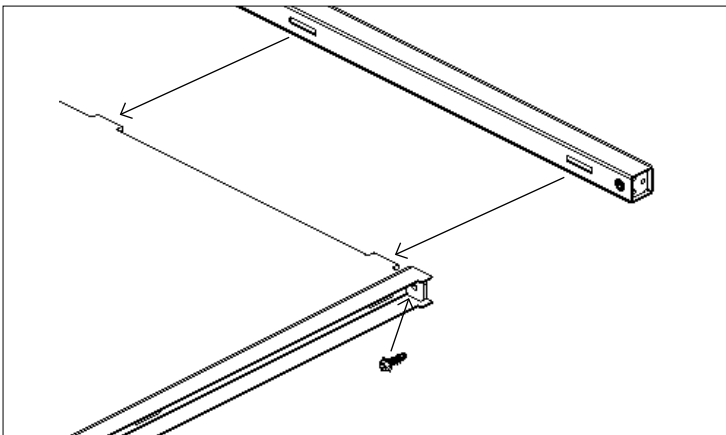


FIGURE 3

Slide the Vertical Support Tube onto the tabs of the Acrylic Panel as seen in Figure 3.

Using a ¼-20 x 1.0" Hex Head bolt, attach the Bottom Crossbar Channel to the Vertical Support Tube.

Repeat this step for the other Vertical Support Tube.

# ENWORK

## INSTALLATION GUIDE

### 3) ASSEMBLY:

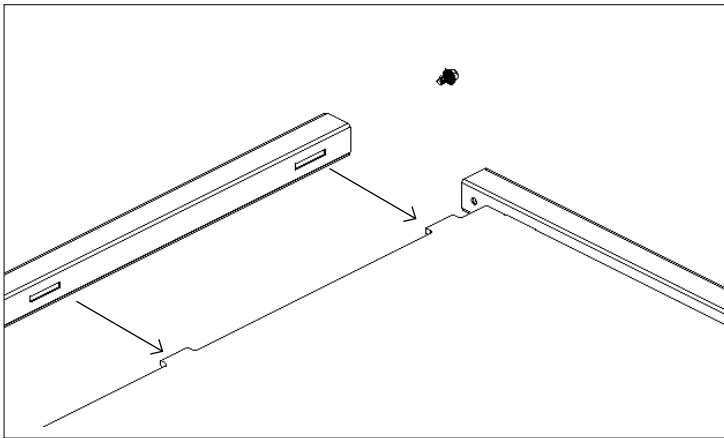


FIGURE 4

Slide the Top Crossbar Support Tube onto the tabs of the Acrylic Panel as seen in Figure 4.

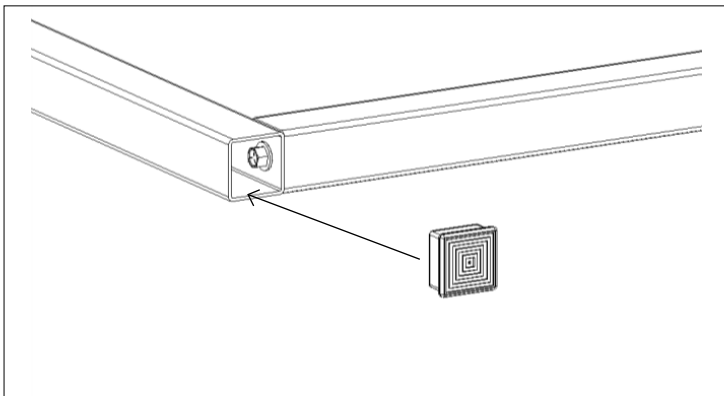


FIGURE 5

Attach the Top Crossbar Support Tube to the Vertical Support Tube using a  $\frac{1}{4}$  20 x .50" Hex Head Bolt.

Install the Black Plastic Tube Plug into the top of the Vertical Support Tube as seen in Figure 5. Repeat these steps for the other Vertical Support Tube.

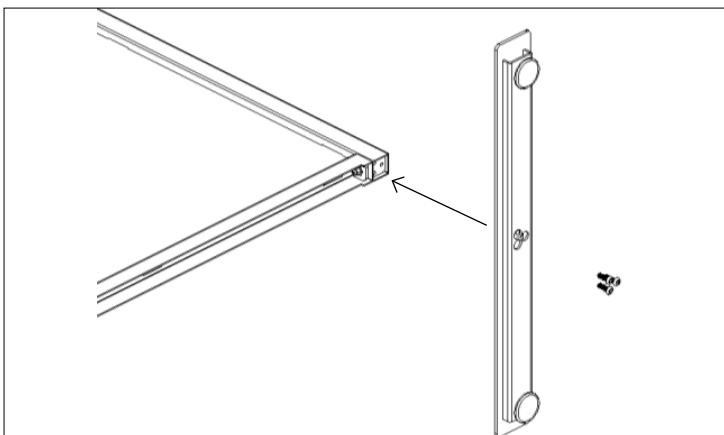


FIGURE 6


Align the T-Foot with the tapped holes in the bottom of the Vertical Support Tubes. Attach the T Foot with  $3 \frac{1}{4}$  20 x .75" Button Head Cap screws as seen in Figure 6.

Repeat this step for the other T-Foot.

# ENWORK

## INSTALLATION GUIDE

### 3) ASSEMBLY:

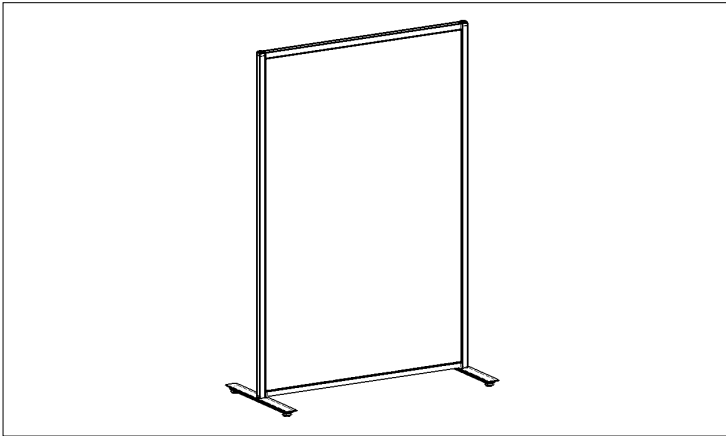

Flip Screen onto the T-Feet.

Assembly Complete!

FIGURE 7

ENWORK

1.800.815.7251

[www.enwork.com](http://www.enwork.com)

12900 Christopher Dr. Lowell, MI 49331

Specifications subject to change without notice.

Rev 08.2020